


DIAZ

HYBRID DIPOLE SPEAKER

SPECIFICATIONS

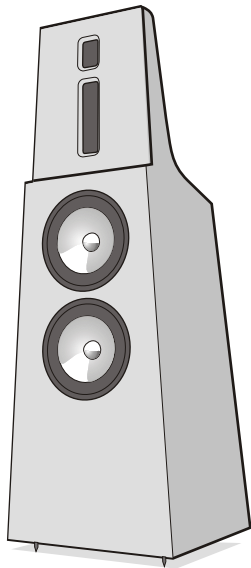

FREQUENCY RESPONSE (corner placement) 25 - 20kHz (-6dB points)

SENSITIVITY 90db, 2.82v / 1m


NOMINAL IMPEDANCE 4 ohms

POWER RATING (individual peak driver rating) 200W, 25 - 400Hz
50W, 400Hz - 20kHz

DRIVE UNITS 75 X 50mm ribbon membrane tweeter
200 X 50mm ribbon membrane midrange
Twin 200mm aluminium cone bass

CROSSOVERS 4 pole from woofer to midrange
2 pole from midrange to tweeter

LF POWER HANDLING (driver excursion limited)

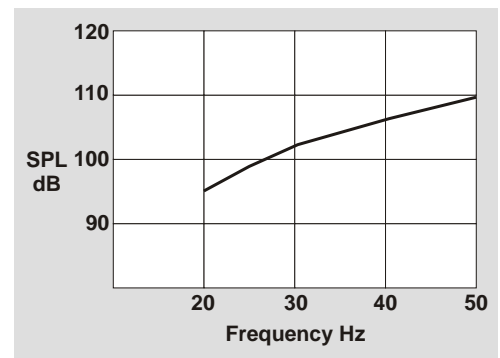

SELECTABLE HF SETTINGS

- A** Flat to 20kHz
- B** 2dB/octave slope from 2kHz
- C** 3dB/octave slope from 1.5kHz (typical dome tweeter)

DIMENSIONS mm 1175H X 410W X 390D

Weight each 29kg

PRICES METALLIC Silver, Pearl white, Graphite
Satin lacquer £4000
Gloss lacquer £4500

PIANO BLACK
£4750

REAL WOOD VENEERS
American cherry, black walnut, maple
with metallic silver baffle.
Satin lacquer £4250
Gloss lacquer £4750

Other veneers, colours to order

MC&A

SOUND PRINCIPLES

Marshall Choong Audio www.mcaudio.co.uk Made in the United Kingdom

All enquiries to: info@mcaudio.co.uk +44 (0)20 8670 3770

© Design right Marshall Choong Audio 2003. Specifications subject to change without notice.